MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **Electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1.6...2.5A

ENERGY AND AUTOMATION



Product designation			RF38
Product type designation			Motor protection
			relay
General characteristics		Nle	2
Number of poles		Nr.	3 III
Overvoltage category Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			ITICITIAI
1 Tote Culon Tuse	gG (IEC)	Α	6
	aM (IEC)	A	4
	RK5 (UL)	Α	10
Phase failure detection	(02)		Yes
			Manual or
Reset mode			automatic
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	Α	1.6
	perational current max	Α	2.5
Tripping class			10A
Test Button			Yes
Trip indicator			Yes
Terminals			_
	type		Screw and
			washer
	SCrew		M4
	width tool	mm	12.6 Phillips 2
Tightening torque for terminals	1001		Fillilips 2
rightening torque for terminals	min	Nm	2
	max	Nm	2.5
	min	Ibin	1.5
	max	Ibin	1.8
Conductor section			
	AWG/kcmil max		8
Auxiliary circuit characteristics			
Auxiliary contacts			
•	NO	Nr.	1



MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE **electric** (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1.6...2.5A


ENERGY AND AUTOMATION

NC Nr. 1 Auxiliary Rated insulation voltage Ui IEC/EN ٧ 690 Auxiliary Rated impulse withstand voltage Uimp k۷ 6 Auxiliary Rated operational voltage 690 Operating current AC15 24V Α 3 120V Α 3 240V Α 1.5 380V Α 0.95 480V 0.75 Α 500V Α 0.72 600V Α 0.6 Operating current DC13 125V Α 0.11 600V Α 0.22 IEC Conventional free air thermal current Ith Α 10 Terminals Screw and Auxiliary circuit type washer Auxiliary circuit screw M3,5 Auxiliary circuit width mm 8 Auxiliary circuit tool Phillips 2 Conductor section Auxiliary circuit Flexible w/o lug max mm² 2.5 Auxiliary circut Flexible c/w lug max mm² 2.5 Tightening torque for terminals Auxiliary circuit min 0.8 Nm Auxiliary circuit max Nm 1 Auxiliary circuit min Ibin 0.59 Auxiliary circuit max Ibin 0.74 UL/CSA and IEC/EN 60947-5-1 designation B600-R300 Ambient conditions Operating temperature °C min -25 °C 60 max Storage temperature °C -50 min °C 70 max Compensation temperature °C -20 min °C 60 max Max altitude 3000 m Mechanical features Operating position Vertical plan normal ±30° allowable Weight g 160 UL technical data Full-load current (FLA) for three-phase AC motor at 480V Α 2.5 at 600V 2.5 Dimensions


MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1.6...2.5A

ENERGY AND AUTOMATION


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay

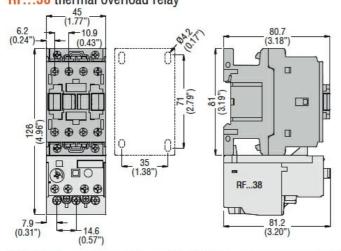

- BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay

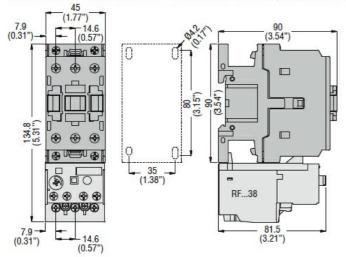

Wiring diagrams

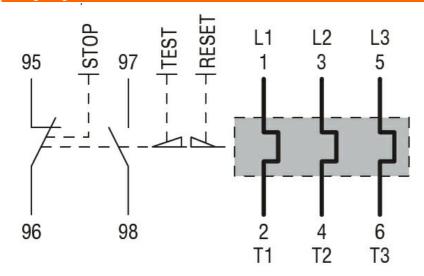

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1



RF380250

MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1.6...2.5A

	UL508
Certifications	
	CCC
	cULus
	EAC
ETIM classification	

ENERGY AND AUTOMATION

ETIM 8.0

EC000106 -Thermal overload relay