## **RF381000**



MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 6.3...10A



			11.00
Product designation			RF38
Product type designation			Motor protection
			relay
General characteristics			
Number of poles		Nr.	3
Overvoltage category			
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	А	20
	aM (IEC)	А	10
	RK5 (UL)	А	40
Phase failure detection			Yes
Reset mode			Manual or
			automatic
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	А	6.3
	Operational current max	А	10
Tripping class			10A
Test Button			Yes
Trip indicator			Yes
Terminals			
	<b>6</b>		Screw and
	type		washer
	screw		M4
	width	mm	12.6
	tool		Phillips 2
Tightening torque for terminals			
	min	Nm	2
	max	Nm	2.5
	min	Ibin	1.5
	max	Ibin	1.8
Conductor section			
	AWG/kcmil max		8
Auxiliary circuit characteristics			
Auxiliary contacts			
	NO	Nr.	1
			-



ENERGY AND AUTOMATION

**RF381000** MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 6.3...10A

	NC	Nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN		V	690
Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated operational voltage		V	690
Operating current AC15			
	24V	А	3
	120V	А	3
	240V	А	1.5
	380V	А	0.95
	480V	А	0.75
	500V	А	0.72
	600V	А	0.6
Operating current DC13			
	125V	А	0.11
	600V	А	0.22
IEC Conventional free air thermal current Ith		Α	10
Terminals			
	Auxiliary circuit type		Screw and washer
	Auxiliary circuit screw		M3,5
	Auxiliary circuit width	mm	8
	Auxiliary circuit tool		Phillips 2
Conductor section			•
	Auxiliary circuit Flexible w/o lug max	mm²	2.5
	Auxiliary circut Flexible c/w lug max	mm²	2.5
Tightening torque for terminals	, , , , , , , , , , , , , , , , , , , ,		
5 5 1	Auxiliary circuit min	Nm	0.8
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	Ibin	0.59
	Auxiliary circuit max	lbin	0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	60
Storage temperature			
	min	°C	-50
	max	°C	70
Compensation temperature			
-	min	°C	-20
	max	°C	60
Max altitude		m	3000
Mechanical features			
Operating position			
			\/ anti-al-al-al-a
	normal		vertical plan
	normal allowable		Vertical plan ±30°
Weight		a	-
Weight UL technical data		g	±30°
UL technical data		g	±30°
	allowable		±30° 160
		g A A	±30°

RF381000






MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 6.3...10A


ENERGY AND AUTOMATION

BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with


RF...38 thermal overload relay

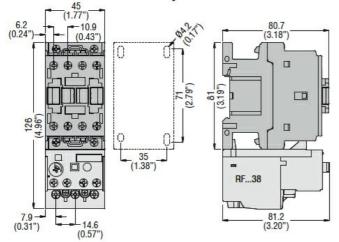

- BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay BF26 00A...

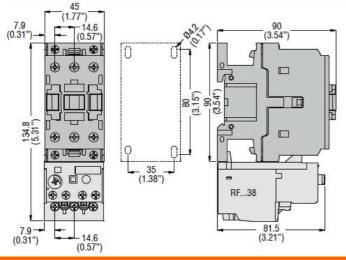

Wiring diagrams

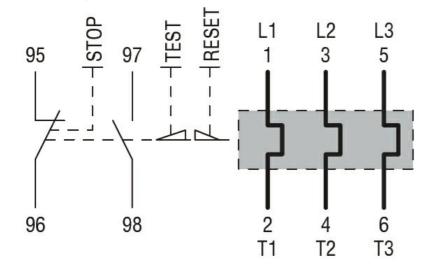

## Certifications and compliance

## Compliance

CSA C22.2 n° 14 IEC/EN 60947-1 IEC/EN 60947-4-1

RF381000



ENERGY AND AUTOMATION

**RF381000** MOTOR PROTECTION RELAY, PHASE FAILURE / SINGLE PHASE SENSITIVE. THREE POLE electric (THREE PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 6.3...10A

	UL508		
Certifications			
	CCC		
	cULus		
	EAC		
ETIM classification			
			EC000106 -

**ETIM 8.0** 

EC000106 -Thermal overload relay