

# Spiral Binding for Ø 1,5 to 100 mm




PLIOSPIRE



## PLIOSPIRE PE

	PE	PE-AF
<b>Materials:</b>	polyethylene	polyethylene (flame resistant)
<b>Operating temperatures:</b>	-50 to +85°C	-50 to +75°C
<b>Density:</b>	0,92	0,97
<b>Tensile strength:</b>	12 N/mm <sup>2</sup>	12 N/mm <sup>2</sup>
<b>Ultimate elongation:</b>	550 %	400 %
<b>Dielectric strength:</b>	> 25 kV/mm	> 25 kV/mm
<b>Flammability:</b>	-	V2 UL94
<b>Specifications:</b>		some halogene

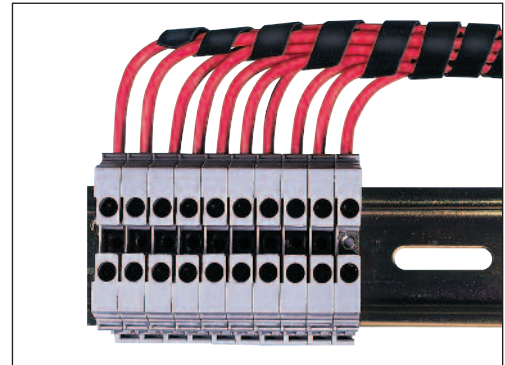


type	article number							capacity Ø mm	Ø o.d. mm	wall thick- ness (mm)	helix pitch mm	 m
	natural 	red 	orange 	blue 	yellow 	grey 	black 					
PE 3	0819 0001 018	0819 0024 007	0819 0024 005	0819 0024 002	0819 0024 004	0819 0004 013	0819 0004 010	1,5...7	3	0,75	5	50*
PE 6	0819 0002 018	0819 0025 007	0819 0025 005	0819 0025 002	0819 0025 004	0819 0005 013	0819 0005 010	5...20	6	1	8	25*
PE 12	0819 0003 018	0819 0026 007	0819 0026 005	0819 0026 002	0819 0026 004	0819 0006 013	0819 0006 010	10...40	12	1,5	10	25*
PE 17	0819 0029 018	-	-	-	-	-	0819 0029 010	20...60	17	1,5	10	25
PE 22	0819 0021 018	-	-	-	-	-	0819 0022 010	25...100	22	1,5	10	25

type	article number	capacity Ø mm	Ø o.d. mm	wall thick- ness mm	helix pitch mm	 m
	white 					
PE 3 AF	0819 0007 001	1,5...7	3	0,75	5	50*
PE 6 AF	0819 0008 001	5...20	6	1	8	25*
PE 12 AF	0819 0009 001	10...40	12	1,5	10	25*
PE 22 AF	0819 0023 001	25...100	22	1,5	10	25

\* To facilitate the hooping, a PLIOSPIRE guide is delivered with each package for types 3, 6, 12.

## PLIOSPIRE PVC

<b>Material:</b>	PVC quality 9921
<b>Operating temperatures:</b>	-15 to +80°C
<b>Density:</b>	1,30
<b>Tensile strength:</b>	25 N/mm <sup>2</sup>
<b>Ultimate elongation:</b>	300 %
<b>Dielectric strength:</b>	20 kV/mm

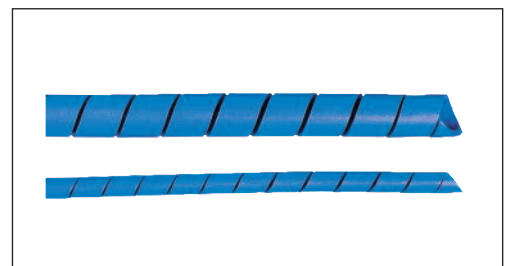

type	article number						capacity Ø mm	Ø o.d. mm	wall thickness mm	helix pitch mm	 m
	transparent 	red 	blue 	yellow 	white 	black* 					
PVC 3	0819 0013 011	0819 0013 007	0819 0013 002	0819 0013 004	0819 0013 001	0819 0013 010	1,5...7	3	0,75	5	50*
PVC 6	0819 0014 011	0819 0014 007	0819 0014 002	0819 0014 004	0819 0014 001	0819 0014 010	5...20	6	1	8	25*
PVC 12	0819 0015 011	0819 0015 007	0819 0015 002	0819 0015 004	0819 0015 001	0819 0015 010	10...40	12	1,5	10	25*

\*\* colour black: weather resistant.

# Spiral Binding

for Ø 2 to 40 mm depending on model



PLIOSPIRE



## PLIOSPIRE

	PP	PA	PTFE
<b>Materials:</b>	polypropylene weather resistant	polyamid weather resistant	polytetrafluorethylene for extreme temperatures
<b>Colours:</b>	black	black	natural (translucent)
<b>Operating temperatures:</b>	-40 to +90°C	-40 to +120°C	-200 to +260°C
<b>Density:</b>	0,90	1,08	2,20
<b>Tensile strength:</b>	30 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>	20 N/mm <sup>2</sup>
<b>Ultimate elongation:</b>	500 %	240 %	300 %
<b>Dielectric strength:</b>	>25 kV/mm	16 kV/mm	50 kV/mm
<b>Flammability:</b>	-	HB UL94	V0 UL94
<b>Specifications:</b>			-



type	article number		capacity Ø mm	Ø o.d. mm	wall thick-ness mm	helix pitch mm	m
	PP black 010	PA black 010					
PP 3	0819 0010 010	PA 3 0819 0016 010	2...7	3	0,4	5	50*
PP 6	0819 0011 010	PA 6 0819 0017 010	5...20	6	0,6	8	25*
PP 12	0819 0012 010	PA 12 0819 0018 010	10...40	12	0,8	10	25*

type	article number		capacity Ø mm	Ø o.d. mm	wall thick-ness mm	helix pitch mm	m
	PTFE natural 001						
PTFE 3	0819 0019 001		2...7	3	0,5	5	10*
PTFE 6	0819 0020 001		5...20	6	0,75	8	10*


\* To facilitate the hooping, a PLIOSPIRE guide is delivered with each package for types 3, 6, 12.

All PLIOSPIRE cable bindings can be supplied in customised lengths. Please ask our sales staff.




### • PLIOSPIRE Tool (for easier application)

type	article number	for types	
Tool	0819 0101 001	3 - 6 - 12	10

Operating instruction in video

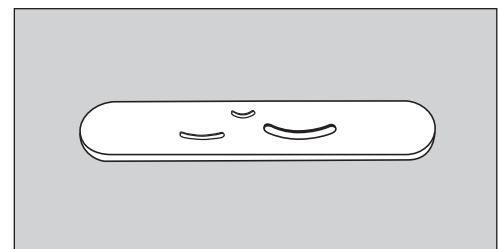

How to use the PLIOSPIRE tool:

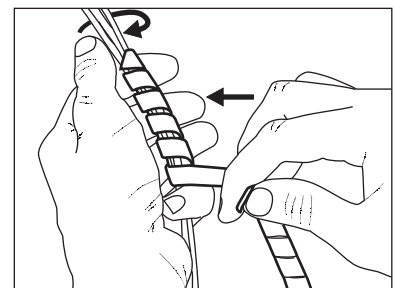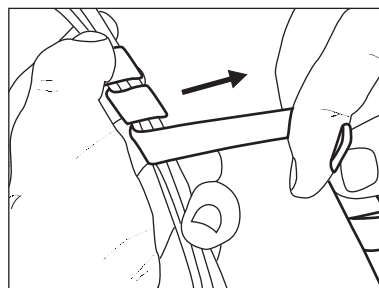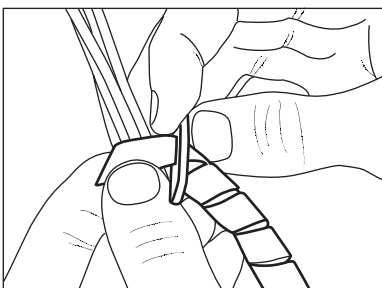


**PLIOSPIRE MDE**


*New*

**Material:** Polypropylene with metal particles  
**Colour:** metal blue  
**Operating temperatures:** -20 to +70°C  
**Ultimate elongation:** 100 %  
**Chemical resistance:** good resistance to acids, alkalis and detergents  
**Specification:** adapted to the success of a HACCP\*\* processes.

**Application:** The presence of metal particles in the spiral binding allows for easy detection thanks to any metal detector. This spiral binding is thus used in electrical equipment boxes or chains of production in food and pharmaceutical industries to limit the risks of product contamination.

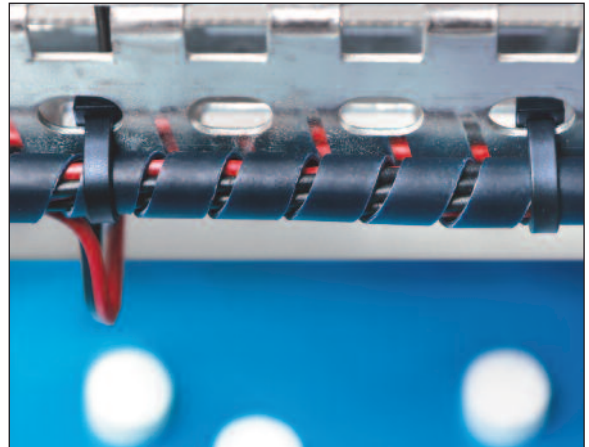

\*\* HACCP : Hazard Analysis Critical Control Point

type	article number	capacity Ø mm	Ø o.d. mm	wall thick- ness mm	helix pitch mm	 m
	<b>093</b>					
<b>PP6 MDE</b>	0819 0082 093	5...20	6	0,8	8	25
<b>PP12 MDE</b>	0819 0083 093	10...40	12	1	10	25

The spiral binding PLIOSPIRE MDE is available in special lengths upon request.  
Please consult us.



C12/3-01 - Cable ties SL MDE



B7/3-07 - Identification system sensitive to metal detector





[www.klinkmann.com](http://www.klinkmann.com)

**HELSINKI**

tel. +358 9 540 4940  
info@klinkmann.fi

**ST. PETERSBURG**

tel. +7 812 327 3752  
klinkmann@klinkmann.spb.ru

**MOSCOW**

tel. +7 495 641 1616  
moscow@klinkmann.spb.ru

**YEKATERINBURG**

tel. +7 343 287 19 19  
yekaterinburg@klinkmann.spb.ru

**SAMARA**

tel. +7 846 273 95 85  
samara@klinkmann.spb.ru

**UFA**

tel. +7 347 293 70 04  
klinkmann@klinkmann.ru

**KIEV**

tel. +38 044 495 33 40  
klinkmann@klinkmann.kiev.ua

**KAZAKHSTAN**

tel. +77779994825  
sales@klinkmann.kz

**MINSK**

tel. +375 17 200 0876  
minsk@klinkmann.com

**RIGA**

tel. +371 6738 1617  
info@klinkmann.lv

**VILNIUS**

tel. +370 5 215 1646  
info@klinkmann.lt

**TALLINN**

tel. +372 668 4500  
info@klinkmann.ee