

This guide provides specifications for Unitronics' Uni-COM™ Modules.

Uni-COM™ modules are compatible with UniStream™ family of Programmable Logic Controllers. They are snapped onto the back of a UniStream™ HMI Panel next to a CPU-for-Panel to add ports to an all-in-one HMI + PLC controller. UAC-01RS2 offers one RS232 port, UAC-02RS2 offers two RS232 ports, UAC-02RSC offers one RS232 port and one RS485 port.


Installation Guides are available in the Unitronics Technical Library at [www.unitronics.com](http://www.unitronics.com)

Communication	UAC-01RS2	UAC-02RS2	UAC-02RSC
<b>RS232</b>			
Number of ports	1	2	1
Voltage limits (receiver)	±20 VDC maximum, relative to Signal Ground (SG) pin		
Baud rate range	1,200 – 115,200 bps		
Isolation voltage			
Port to bus	500VAC for 1 minute		
Port to port	-	500VAC for 1 minute	
Connector type	D-Sub 9 pin, male		
Cable type	Shielded		
Cable length	Maximum 15 m (50 ft)		
<b>RS485</b>			
Number of ports	-	-	1
Voltage limits	-	-	-7 to +12 VDC maximum, Common+Differential
Baud rate range	-	-	1,200 – 115,200 bps
Nodes	-	-	Up to 32
Isolation voltage			
Port to bus	-	-	500VAC for 1 minute
Port to port	-	-	500VAC for 1 minute
Cable type	-	-	Shielded twisted pair, in compliance with EIA RS485
Cable length	-	-	Maximum 1,200 m (4,000 ft)


<b>IO/COM Bus</b>			
Bus current consumption	UAC-01RS2	UAC-02RS2	UAC-02RSC
	160mA	250mA	260mA

<b>Indicator LEDs</b>		
Channel LEDs	Green	Blinking when data is Transmitted/Received.
Status LED	Green	<b>ON:</b> Normal operation. <b>OFF:</b> No power.

Environmental			
Ingress Protection	IP 20, NEMA 1		
Operational temperature	-20°C to 55°C (-4°F to 131°F)		
Storage temperature	-30°C to 70°C (-22°F to 158°F)		
Relative Humidity (RH)	5% to 95% (non-condensing)		
Shock	IEC 60068-2-27, 15G, 11ms duration		
Vibration	IEC 60068-2-6, 5Hz to 8.4Hz, 3.5mm constant amplitude, 8.4Hz to 150Hz, 1G acceleration.		
Dimensions			
Weight	UAC-01RS2	UAC-02RS2	UAC-02RSC
	0.15 Kg (0.331 lb)	0.15 Kg (0.331 lb)	0.135 Kg (0.298 lb)
Size	As shown in the images below		

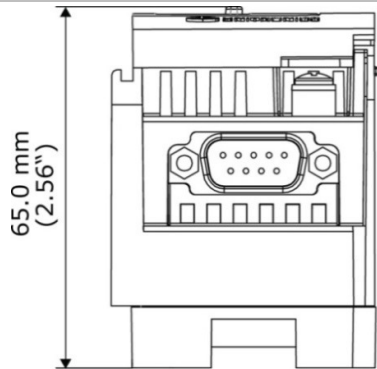

Bottom View (UAC-02RS2 is shown)

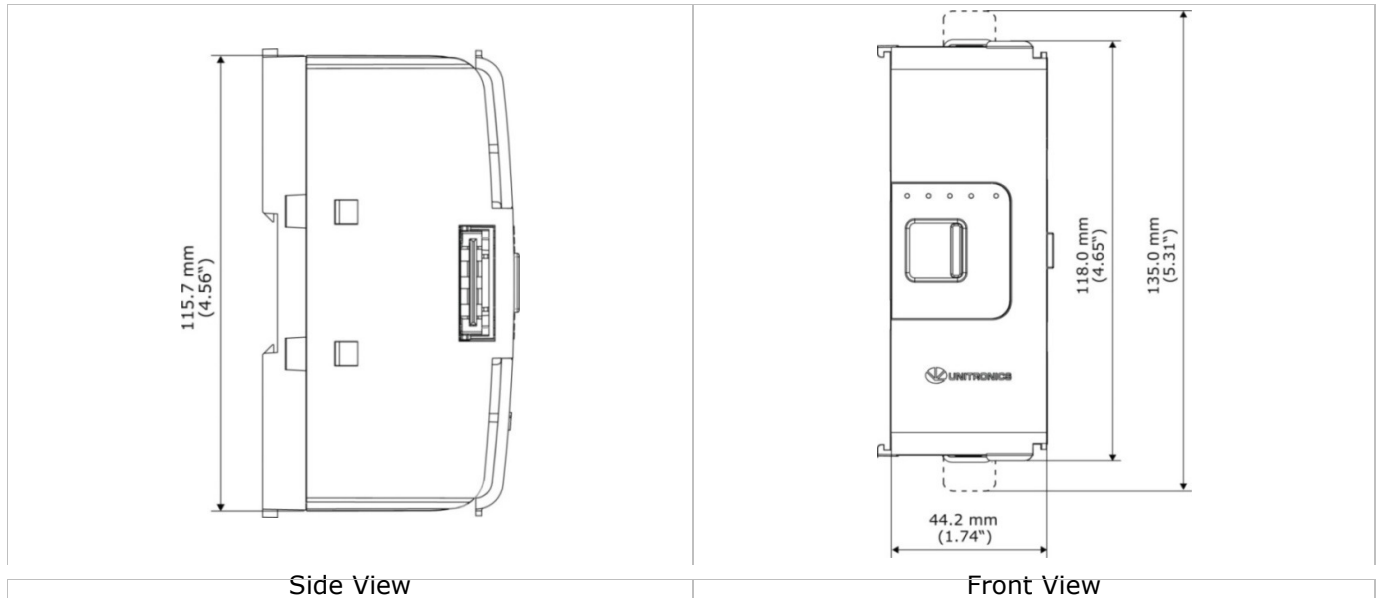

Side View

Front View



**Helsinki**  
tel. +358 9 540 4940  
automation@klinkmann.fi

**St. Petersburg**  
tel. +7 812 327 3752  
klinkmann@klinkmann.spb.ru

**Moscow**  
tel. +7 495 641 1616  
moscow@klinkmann.spb.ru

**Yekaterinburg**  
tel. +7 343 287 19 19  
yekaterinburg@klinkmann.spb.ru

**Samara**  
tel. +7 846 273 95 85  
samara@klinkmann.spb.ru

**Kiev**  
tel. +38 044 495 33 40  
klinkmann@klinkmann.kiev.ua

**Riga**  
tel. +371 6738 1617  
klinkmann@klinkmann.lv

**Vilnius**  
tel. +370 5 215 1646  
post@klinkmann.lt

**Tallinn**  
tel. +372 668 4500  
klinkmann.est@klinkmann.ee

**Minsk**  
tel. +375 17 200 0876  
minsk@klinkmann.com