

SES trunking GF-A6/4 grey with slots and base punching



GF-A6/4
Colour grey

Slots and webs :	slots 4 mm - webs 6 mm
Standard length :	2 metres (other lengths upon request)
Minimum delivery :	1 packing unit (base and lids are packed together)
Colour :	grey (GY 013) (RAL 7030)
Material :	PVC (Grade 9051)
Other technical properties :	see page D100
Dimensions :	see following page



GF-A6/4 trunking

GF-A6/4 trunking			outside dimensions		
type	article number	pack	H	W	h1
Height 23 mm					
GF-A6/4 23x30	0845 0010 013	48 m	23	30	5
GF-A6/4 23x43	0845 0020 013	24 m	23	43	5
Height 25 mm					
GF-A6/4 25x20	0845 0030 013	48 m	25	20	5
Height 35 mm					
GF-A6/4 35x20	0845 0040 013	48 m	35	20	8
GF-A6/4 35x30	0845 0050 013	48 m	35	30	8
GF-A6/4 35x43	0845 0060 013	24 m	35	43	8
Height 42 mm					
GF-A6/4 42x20	0845 0070 013	48 m	42	20	10
GF-A6/4 42x30	0845 0080 013	48 m	42	30	7
GF-A6/4 42x43	0845 0090 013	24 m	42	43	7
GF-A6/4 42x60	0845 0100 013	24 m	42	60	7
GF-A6/4 42x80	0845 0110 013	24 m	42	80	7
GF-A6/4 42x120	0845 0120 013	12 m	42	120	7
Height 50 mm					
GF-A6/4 50x30	0845 0130 013	48 m	48,5	30	8
GF-A6/4 50x43	0845 0140 013	24 m	48,5	43	8
GF-A6/4 50x60	0845 0150 013	24 m	48,5	60	8
Height 60 mm					
GF-A6/4 60x20	0845 0160 013	48 m	60	20	15
GF-A6/4 60x30	0845 0170 013	48 m	60	30	9
GF-A6/4 60x43	0845 0180 013	24 m	60	43	9
GF-A6/4 60x60	0845 0190 013	24 m	60	60	9
GF-A6/4 60x80	0845 0200 013	24 m	60	80	15
GF-A6/4 60x100	0845 0204 013	24 m	60	100	15
GF-A6/4 60x120	0845 0210 013	12 m	60	120	15
Height 80 mm					
GF-A6/4 80x30	0845 0220 013	24 m	80	30	15
GF-A6/4 80x43	0845 0230 013	24 m	80	43	15
GF-A6/4 80x60	0845 0240 013	24 m	80	60	15
GF-A6/4 80x80	0845 0250 013	24 m	80	80	15
GF-A6/4 80x100	0845 0254 013	12 m	80	98	15
GF-A6/4 80x120	0845 0260 013	12 m	80	120	15
Height 100 mm					
GF-A6/4 100x30	0845 0280 013	24 m	100	30	20
GF-A6/4 100x60	0845 0290 013	24 m	100	60	20
GF-A6/4 100x80	0845 0300 013	12 m	100	80	20
GF-A6/4 100x100	0845 0270 013	12 m	100	100	20
GF-A6/4 100x150	0845 0271 013	12 m	100	150	20

GF-DIN-A6/4 trunking

Height 100 mm					
GF-DIN-A6/4 100x50	0845 0286 013	24 m	100	48	20
GF-DIN-A6/4 100x75	0845 0296 013	12 m	100	73	20

For slots, see page C1/1-02

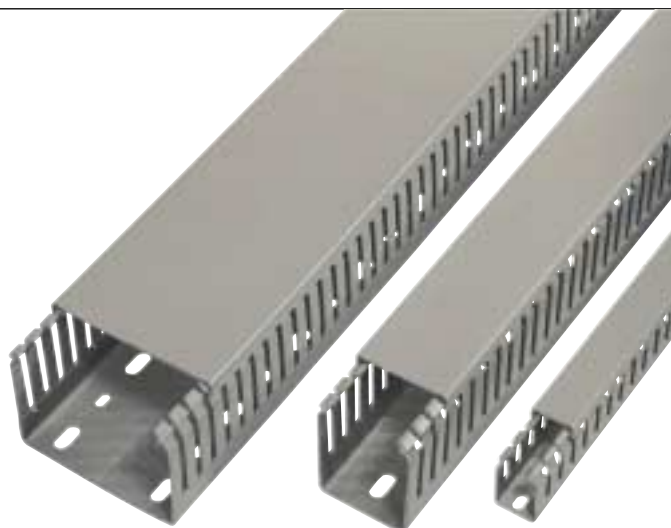

GF-A6/4 trunkings are delivered in standard dimensions without double-sided tape at the base.

Trunkings fitted with double-sided adhesive tape are separately priced.

For GF-A6/4 trunkings, widths 20 to 60 mm :

Art. number : 0845 0903 000

For GF-A6/4 trunkings, widths 80 to 150 mm :

Art. number : 0845 0904 000

The adhesive tape allows temporary fastening before final attachment.

Double-sided adhesive tape can be delivered in rolls of different widths. See page C3/1-4-02



Lids for GF trunkings GREY

(GF cable trunkings are always delivered with lids)

Delivery of lids only by request.



Lids for GF trunkings


type	article number	pack	for trunkings		
Width 20 mm			GF-A6/4 25x20	GF-A6/4 35x20	
Lid GF 20	0845 0605 013	48 m	GF-A6/4 42x20	GF-A6/4 60x20	
Width 30 mm			GF-A6/4 23x30	GF-A6/4 35x30	GF-A6/4 42x30
Lid GF 30	0845 0610 013	24 m	GF-A6/4 50x30	GF-A6/4 60x30	GF-A6/4 80x30
			GF-A6/4 100x30		
Width 43 mm			GF-A6/4 23x43	GF-A6/4 35x43	GF-A6/4 42x43
Lid GF 43	0845 0615 013	24 m	GF-A6/4 50x43	GF-A6/4 60x43	GF-A6/4 80x43
Width 60 mm			GF-A6/4 42x60	GF-A6/4 50x60	GF-A6/4 60x60
Lid GF 60	0845 0620 013	24 m	GF-A6/4 80x60	GF-A6/4 100x60	
Width 80 mm			GF-A6/4 42x80	GF-A6/4 60x80	
Lid GF 80	0845 0625 013	24 m	GF-A6/4 80x80	GF-A6/4 100x80	
Width 100			GF-A6/4 60x100	GF-A6/4 80x100	
Lid GF 100	0845 0630 013	12 m	GF-A6/4 100x100		
Width 120			GF-A6/4 42x120	GF-A6/4 60x120	
Lid GF120	0845 0635 013	12 m	GF-A6/4 80x120		
Width 150 mm					
Lid GF 150	0845 0636 013	12 m	GF-A6/4 100x150		

Lids for GF-DIN trunking

Width 50 mm			
Lid GF-DIN 50	0845 0650 013	24 m	GF-DIN-A6/4 100x50
Width 75 mm			
Lid GF-DIN 75	0845 0655 013	24 m	GF-DIN-A6/4 100x75

SES TRUNKING GF-A6/4

Technical illustrations : cross-section, side view and base punching

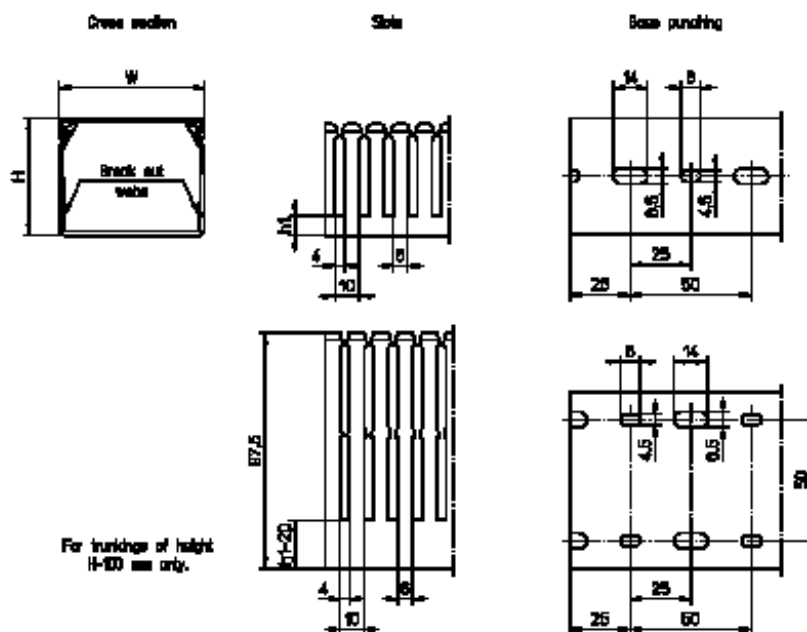

base punching to DIN 43659 in one line for trunkings of widths 20 - 30 - 43 and 60 mm, and in two lines for trunkings of widths 80 - 100 - 120 and 150 mm (distance between lines: 50 mm).